


Entrapment Protection Devices



Light Curtains and Components

LIGHTCURTAIN 001

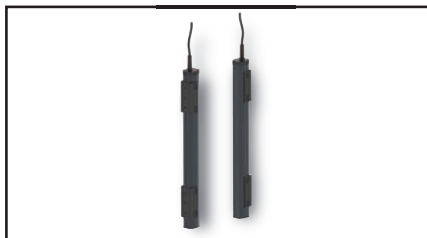


- Monitored
- Invisible curtain of protection to be installed near the door track or guides
- UL325 Recognized Component
- Thru-beam type
- Approx. 32' range
- Detection Height: 36"
- Exterior / Interior use
- IP67
- Housing Material: Black PVC/aluminum
- Operation Temp.: -40°C to 60°C (-40°F to 140°F)
- Power Supply: 12-24 VAC/DC (10 VDC Min.), 100 mA Max. at 24 VDC
- Dimensions: 1" x 1.13" x 38"
- Detection Angle: Tx: +/-10°, Rx: +/- 20°
- Includes: Transmitter/Receiver units, 3' of connection wire, mounting brackets
- Compatible with: INTERFACE003

LIGHTCURTAIN 002



- Monitored
- Invisible curtain of protection to be installed near the door track or guides
- UL325 Recognized Component
- Thru-beam type
- Approx. 32' range
- Detection Height: 72"
- Exterior / Interior use
- IP67
- Housing Material: Black PVC/aluminum
- Operation Temp.: -40°C to 60°C (-40°F to 140°F)
- Power Supply: 12-24 VAC/DC (10 VDC Min.), 100 mA Max. at 24 VDC
- Dimensions: 1" x 1.13" x 38"
- Detection Angle: Tx: +/-10°, Rx: +/- 20°
- Includes: Transmitter/Receiver units, 3' of connection wire, mounting brackets
- Compatible with: INTERFACE003

INTERFACE 003

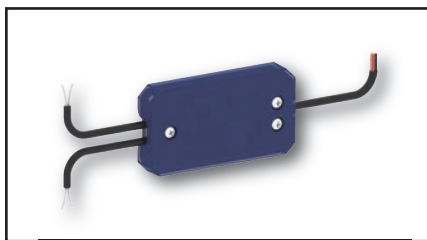

- Y-connect Signal Merging Interface Module
- To merge two monitored photo-electric cells on the same monitored input on the ECB
- UL325 Recognized Component
- Exterior / Interior use
- Nema 4 enclosure
- Housing Material: ABS/PA6 GF30/TPE
- Operation Temp.: -23°C to 77°C (-13°F to 167°F)
- Power Supply: 24 VAC/VDC - 15mA
- Dimensions: 1.5" x 3" x 0.5"
- Includes: 1 interface module unit
- Compatible with: PHOTO061, PHOTO062, PHOTO065, PHOTO067, PHOTO068, PHOTO070, LIGHTCURTAIN001, LIGHTCURTAIN002