

## Push-Button Control Stations

### STATION 001



- Surface mount
- 1-Button, either open only or open/close command
- Indoor use
- Nema 1 enclosure
- Housing Material: Steel enclosure
- 1 NO contact
- Dimensions: 2.38" x 2.88" x 1.19"
- Includes: Control station unit

### STATION 081




- Surface mount
- 1-Button, either open only or open/close command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 1 NO contact
- Dimensions: 2.68" x 2.68" x 2.44"
- Includes: Control station unit
- Compatible with: Additive NO or NC contacts can be added

### STATION 010



- Surface mount
- 2-Button, either open only or close only command
- Indoor use
- Nema 1 enclosure
- Housing Material: Steel enclosure
- 2 NO contacts
- Dimensions: 2.38" x 4.06" x 1.81"
- Includes: Control station unit

### STATION 082

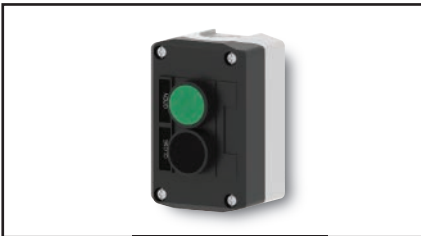

- Surface mount
- 2-Button, either open only or close only command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 2 NO contacts
- Dimensions: 2.68" x 4.17" x 2.44"
- Includes: Control station unit
- Compatible with: Additive NO or NC contacts can be added

### STATION 020



- Surface mount
- 3-Button, open, close and stop command
- Indoor use
- Nema 1 enclosure
- Housing Material: Steel enclosure
- 2 NO and 1 NC (stop) contacts
- Dimensions: 2.38" x 5" x 1.81"
- Includes: Control station unit
- For French version, order STATION084

### STATION 078



- Surface mount
- 3-Button, open, close and stop command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 2 NO and 1 NC (stop) contacts
- Dimensions: 2.68" x 5.35" x 2.44"
- Includes: Control station unit
- For French version, order STATION078F
- Compatible with: Additive NO or NC contacts can be added

### STATION 056



- Surface mount
- 3-Button, open, close and stop command
- Exterior use
- Nema 3R, 4, 12 enclosure
- Housing Material: Aluminum die-cast enclosure
- 1 NO and 1 NC (stop) contacts
- Dimensions: 4.13" x 4.34" x 2.63"
- Includes: Control station unit

### STATION 049



- Surface mount
- 3-Button, open, close and stop command
- Interior use
- Class I, Div. 1 & 2, Groups C,D Class I, Zones 1 & 2, Groups IIB, IIA Class II, Div. 1 & 2, Groups E,F,G Class III, NEMA 7(C,D) / 9(E,F,G) Classified Hazardous Locations
- CSA certified/UL listed
- Housing Material: Aluminum die-cast enclosure
- Operation Temp.: -20°C to 40°C (-4°F to 104°F)
- 2 NO and 1 NC (stop) contacts
- Dimensions: 3" x 6.13" x 4.34"
- Includes: Control station unit

### STATION 079



- Surface mount
- 3-Button with key lock-out, open, close and stop command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 2 NO and 1 NC (stop) contacts, key: 1 NO contact
- Dimensions: 2.68" x 6.54" x 2.44"
- Includes: Control station unit and 2 keys
- Compatible with: Additive NO or NC contacts can be added

### STATION 057



- Surface mount
- 3-Button with key lock-out, open, close and stop command
- Exterior use
- Nema 3R, 4, 13 enclosure
- Surface mount
- Housing Material: Aluminum die-cast enclosure
- 2 NO and 1 NC (stop) contacts key: in series with stop NC contact
- Dimensions: 4.13" x 4.34" x 2.63"
- Includes: Control station unit and 2 keys

### STATION 050



- Surface mount
- 3-Button with key switch, open, close and stop command
- Interior use
- Class I, Div. 1 & 2, Groups C,D Class I, Zones 1 & 2, Groups IIB, IIA Class II, Div. 1 & 2, Groups E,F,G Class III, NEMA 7(C,D) / 9(E,F,G) Classified Hazardous Locations
- CSA certified/UL listed
- Housing Material: Aluminum die-cast enclosure
- 2 NO and 1 NC (stop) contacts, key: 1 NO and 1 NC contacts
- Dimensions: 6.5" x 6.13" x 5.08"
- Includes: Control station unit and 2 keys

### STATION 080



- Surface mount
- 3-Button with key lock-out and pilot light, open, close and stop command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 2 NO and 1 NC (stop) contacts, key: 2 NO contacts
- Dimensions: 2.68" x 6.54" x 2.44"
- Includes: Control station unit and 2 keys
- Compatible with: Additive NO or NC contacts can be added

## Push-Button Control Stations and Components

### STATION 088



- Surface mount
- 1 Mushroom head (green) with spring return, either open only or open / close command
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 2 NO contacts
- Dimensions: 2.68" x 2.68" x 2.44"
- Includes: Control station unit

### STATION 085




- Surface mount
- 1 Mushroom head (red) with spring return, for emergency stop
- Exterior use
- Nema 4/12 and 4X enclosure
- Housing Material: Non-metallic enclosure
- Operation Temp.: -25°C to 70°C (-13°F to 158°F)
- 1 NO contact
- Dimensions: 2.68" x 2.68" x 2.44"
- Includes: Control station unit
- Compatible with: Additive NO or NC contacts can be added

### STATION 086



- Flush mount
- 3-Button, open, close and stop command
- Indoor use
- Nema 1 enclosure
- Housing Material: Steel enclosure
- 2 NO, 1 NC contacts
- Dimensions: Faceplate 2.75" x 4.5" x 0.38" / Back box 2.75" x 4.25" x 1.88"
- Includes: Control station unit, back box with bracket, aluminum face plate

### KEY 006

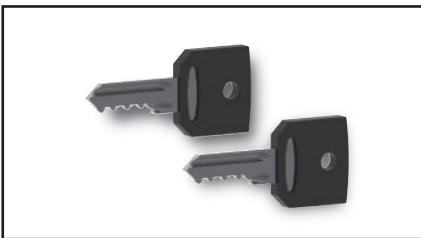

- Set of two replacement keys
- Indoor / Exterior use
- Compatible with: STATION079, STATION080, STATION089