


Customer:		
Project:		
Architect/Engineer:		
Contractor:		
Drawing No.:	Date:	Sheet of

## Shop Drawing

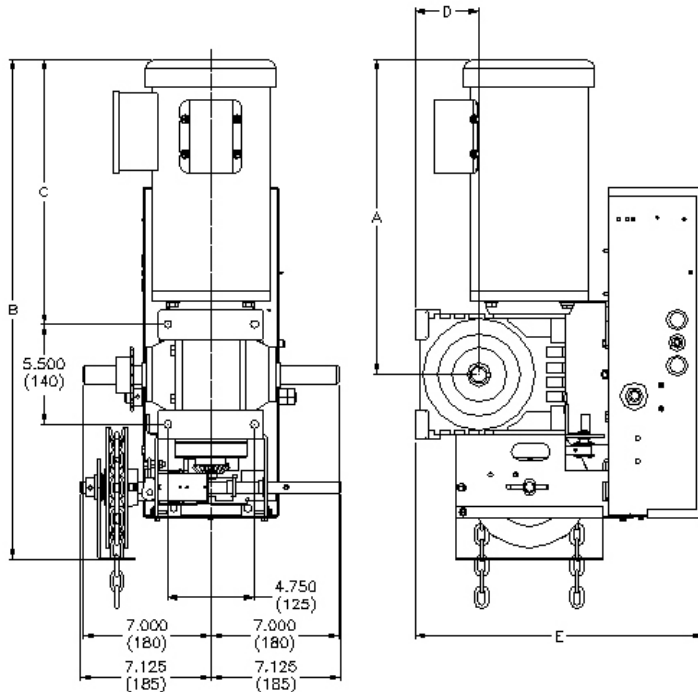

Dimensions	UP TO 1 HP	1.5 TO 2 HP
<b>A</b>	15.625 (400)	17.625 (450)
<b>B</b>	25.750 (655)	27.750 (705)
<b>C</b>	12.875 (330)	14.875 (380)
<b>D</b>	3.000 (80)	3.500 (90)
<b>E</b>	15.500 (395)	16.000 (410)

Motor Amperage Rating						
HP	Voltage - Phase					
	115 V - 1 Ph	230 V - 1 Ph	208 / 230 V - 3 Ph	460 V - 3 Ph	575 V - 3 Ph	
1/2	9.0	4.5	2.2	1.1	-	
3/4	11.2	5.6	3.2	1.5	1.2	
1	13.6	6.8	3.7	1.7	1.4	
1 1/2	19.6*	9.8	5.3	2.5	2.0	
2	-	-	6.5*	3.1*	2.5*	

\* ECB not available

### • Specifications For Ordering

<b>Quantity:</b>		<b>Model Number:</b>			
<b>HP:</b>	<b>Amperage:</b>	<b>Volts:</b>	<b>Phase:</b>	<b>Hertz:</b>	
<b>Motor Circuit Type:</b> (Circle One) Contactor or ECB					
<b>Door Type:</b>		<b>Width:</b>	<b>Height:</b>	<b>Lift:</b>	
<b>Hand Chain:</b> (Circle One) Left or Right			<b>Drive Sprocket:</b> (Circle One) Left or Right		
<b>Friction Clutch:</b> (Circle One) Left or Right			<b>Drive Sprocket &amp; Chain:</b> (Circle One) #50 or #60		
<b>Supply</b>	<b>3-Push Button Station(s) in NEMA</b>		<b>Enclosure Per Operator</b>		

Supply Auxiliary and Optional Equipment as specified below: One per operator unless otherwise noted.

### • Notes:

1. Refer to model GH Specification Sheet for General Information
2. Refer to Drawing \_\_\_\_\_ for Wiring Diagram