

Customer:

Project:

Architect/Engineer:

Contractor:


Drawing No.:

Date:

Sheet

of

Shop Drawing

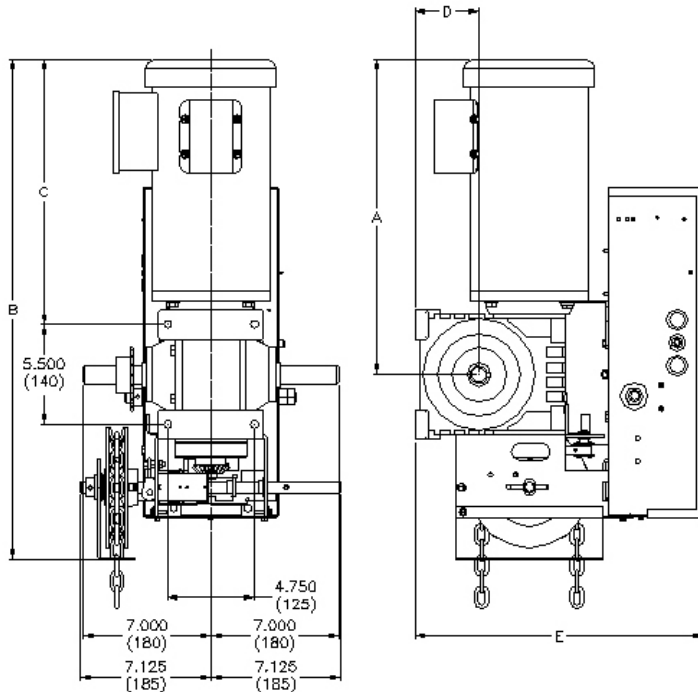

Dimensions	UP TO 1 HP	1.5 TO 2 HP
A	15.625 (400)	17.625 (450)
B	25.750 (655)	27.750 (705)
C	12.875 (330)	14.875 (380)
D	3.000 (80)	3.500 (90)
E	15.500 (395)	16.000 (410)

HP	Motor Amperage Rating				
	Voltage - Phase				
	115 V - 1 Ph	230 V - 1 Ph	208 / 230 V - 3 Ph	460 V - 3 Ph	575 V - 3 Ph
1/2	9.0	4.5	2.2	1.1	-
3/4	11.2	5.6	3.2	1.5	1.2
1	13.6	6.8	3.7	1.7	1.4
1 1/2	19.6*	9.8	5.3	2.5	2.0
2	-	-	6.5*	3.1*	2.5*

* ECB not available

Specifications For Ordering

Quantity:	Model Number:			
HP:	Amperage:	Volts:	Phase:	Hertz:
Motor Circuit Type: (Circle One) Contactor or ECB				
Door Type:	Width:	Height:	Lift:	
Hand Chain: (Circle One) Left or Right		Drive Sprocket: (Circle One) Left or Right		
Friction Clutch: (Circle One) Left or Right		Drive Sprocket & Chain: (Circle One) #50 or #60		
Supply	3-Push Button Station(s) in NEMA		Enclosure Per Operator	

Supply Auxiliary and Optional Equipment as specified below: One per operator unless otherwise noted.

Notes:

1. Refer to model GH Specification Sheet for General Information
2. Refer to Drawing _____ for Wiring Diagram