


Customer:			
Project:			
Architect/Engineer:			
Contractor:			
Drawing No.:	Date:	Sheet	of

## Shop Drawing

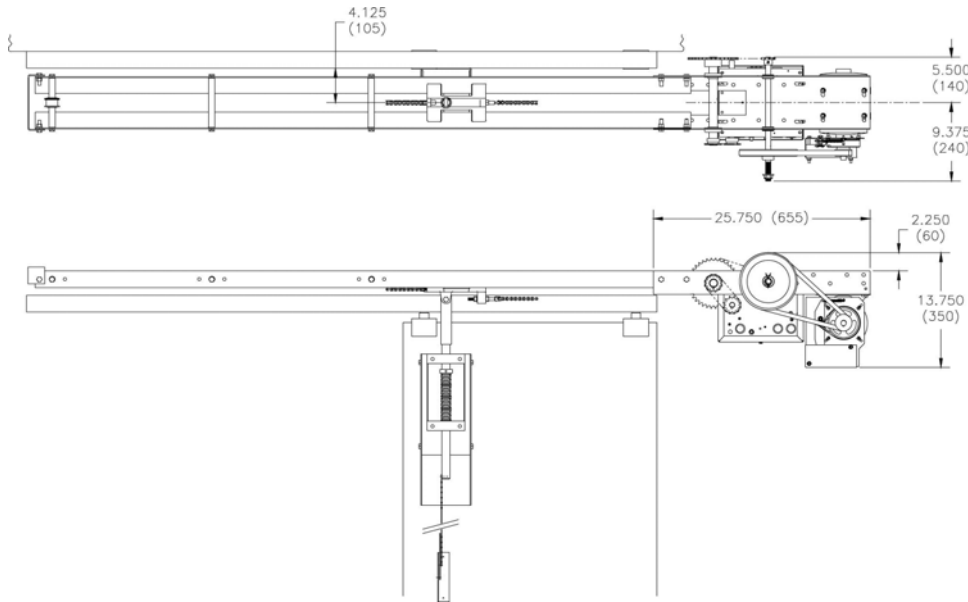

Motor Amperage Rating					
HP	Voltage - Phase				
	115 V - 1 Ph	230 V - 1 Ph	208 / 230 V - 3 Ph	460 V - 3 Ph	575 V - 3 Ph
1/3*	6.6	3.3	-	-	-
1/2	8.0	4.0	2.1	1.0	0.8
3/4	11.2	5.6	3.2	1.5	1.2
1	13.6	6.8	4.4	2.1	1.6

\* Only available in the US

### • Specifications For Ordering

<b>Quantity:</b>		<b>Model Number:</b>			
<b>HP:</b>	<b>Amperage:</b>	<b>Volts:</b>	<b>Phase:</b>	<b>Hertz:</b>	
<b>Motor Circuit Type:</b> (Circle One) Contactor or ECB					
<b>Door Type:</b> (Circle One) Double or Single			<b>Width:</b>	<b>Height:</b>	
<b>Door Slide to Open:</b> (Circle One) Left or Right			<b>Mounting:</b> (Circle One) Left or Right		
<b>Supply</b>	<b>3-Push Button Station(s) in NEMA</b>			<b>Enclosure Per Operator</b>	

Supply Auxiliary and Optional Equipment as specified below: One per operator unless otherwise noted.

### • Notes:

1. Refer to model MSLD Specification Sheet for General Information
2. Refer to Drawing \_\_\_\_\_ for Wiring Diagram