

Opera-GH model

Jackshaft Operator Heavy-Duty Industrial Gear Head

Customer:

Project:

Architect/Engineer:

Contractor:


Drawing No.:

Date:

Sheet

of

Shop Drawing

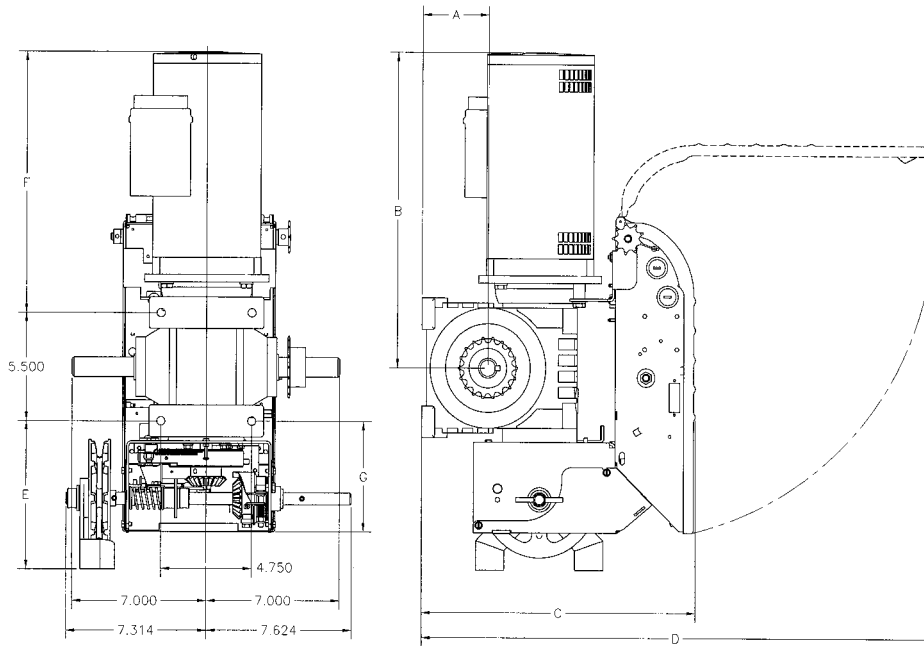

Dimensions	UP TO 1 HP	1.5 & 2 HP
A	3.00 (76)	3.50 (89)
B	12.59 (320)	16.09 (409)
C	13.39 (340)	14.48 (368)
D	25.83 (656)	26.93 (664)
E	7.550 (192)	7.60 (193)
F	9.84 (250)	13.34 (339)
G	5.63 (143)	5.67 (144)

HP	Motor Amperage Rating				
	Voltage - Phase				
	115 V - 1 Ph	230 V - 1 Ph	208 / 230 V - 3 Ph	460 V - 3 Ph	575 V - 3 Ph
1/2	8.6	4.1	2.2	1.1	-
3/4	10.4	5.2	2.8	1.4	1.1
1	13.4	6.7	3.4	1.7	1.4
1 1/2	18.6*	9.3	4.8	2.4	1.9
2	-	-	6.2*	3.1*	2.5*

* ECB not available

• Specifications For Ordering

Quantity:		Model Number:			
HP:	Amperage:	Volts:	Phase:	Hertz:	
Motor Circuit Type: (Circle One) Contactor or ECB					
Door Type:		Width:	Height:	Lift:	
Hand Chain: (Circle One) Left or Right			Drive Sprocket: (Circle One) Left or Right		
Friction Clutch: (Circle One) Left or Right			Drive Sprocket & Chain: (Circle One) #50 or #60		
Supply		3-Push Button Station(s) in NEMA		Enclosure Per Operator	

Supply Auxiliary and Optional Equipment as specified below: One per operator unless otherwise noted.

• Notes:

1. Refer to model OGH Specification Sheet for General Information
2. Refer to Drawing _____ for Wiring Diagram

Toll Free: 800.361.2260
info@manaras.com
www.manaras.com

Reg. T.M. of 9141-0720 Québec Inc.

